

Features

- Onboard 4th Generation Intel® Core™ i U-series Processor
- 2x DDR3L-1600 SO-DIMM, Max 16GB
- Supports DVI-I and 24bit dual channel LVDS
- 2x Intel® PCI-E GbE LAN
- Watchdog timer, Digital I/O, iSMART, iAMT(9.5)
- 2x USB 3.0, 2x USB 2.0, 2x COM, 2x SATA III
- 2x Mini PCI-E slot, mSATA

System

CPU	Intel® Core™ i7-4650U processor (1.7GHz) Intel® Core™ i5-4300U processor (1.9GHz) Intel® Core™ i3-4010U processor (1.7GHz) Intel® Celeron® 2980U processor (1.6GHz)
System Memory	2x DDR3L-1600 SO-DIMM, Max 16GB (Non-ECC)
System Chipset	Integrated in 4th Generation Intel® Core™ i U-series processor
BIOS	AMI BIOS
Watchdog Timer	256 levels
SSD	2x mSATA
H/W Monitor	Yes
Expansion Slot	2x Mini PCI-E (1x full-sized, 1x half-sized)

Graphics

VGA Controller	4th Generation Intel® Core™ i U-series processor integrated graphics
VGA Memory	Shared memory
Display Interface	Supports DVI-I and 24-bit dual channel LVDS

LAN

Controller	IB908AF: Intel® I218LM LAN PHY IB908F: Intel® I218V LAN PHY Intel® I211AT PCI-E Gigabit LAN (as 2 nd LAN)
Connector	2x RJ-45 on board

Multi I/O


I/O Chipset	Nuvoton NCT6102D 1x RS-232/422/485 (Jumperless selection) 1x RS232, 2x SATA III
USB	2 ports USB3.0 on board 2 ports USB2.0 via Pin header
Audio	4th Generation Intel® Core™ i U-series processor built-in HD audio controller w/ Realtek ALC269Q-VC2-GR Codec w/ class-D speaker amplifier
Others	Digital I/O, +9V~ +24V DC-In, iSMART

Mechanical and Environmental

Dimensions	102mm x 147mm (4" x 5.8")
Max. Power Requirement	Intel® Core™ i7-4650U @1.70 GHz w/Transcend 2GB DDR3L-1600 *2 +12V: 2.75A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-4°F~167°F)
Relative Humidity	10%~90% (non-condensing)

Ordering Information

IB908AF-4650	Intel® Core™ i7-4650U(1.7GHz) 3.5-inch Disk Size SBC w/ dual PCI-E GbE LAN, DVI-I & LVDS(24-bit LVDS dual channel), mSATA, iSMART, iAMT (9.5)
IB908AF-4300	Intel® Core™ i5-4300U(1.9GHz) 3.5-inch Disk Size SBC w/ dual PCI-E GbE LAN, DVI-I & LVDS(24-bit LVDS dual channel), mSATA, iSMART, iAMT (9.5)
IB908F-4010	Intel® Core™ i3-4010U(1.7GHz) 3.5-inch Disk Size SBC w/ dual PCI-E GbE LAN, DVI-I & LVDS (24-bit LVDS dual channel), mSATA, iSMART
IB908F-2980	Intel® Celeron® 2980U(1.6GHz) 3.5-inch Disk Size SBC w/ dual PCI-E GbE LAN, DVI-I & LVDS (24-bit LVDS dual channel), mSATA, iSMART
IB75	Cable kit IB908 series, w/ SATA+power cable, USB, COM, power cable
HSIB908-BGA	Heatsink for IB908

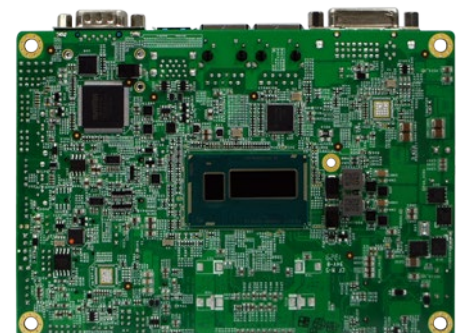

Remarks: 1. Specifications are subject to change without prior notice.
2. ODM/OEM is available.
3. For user's manual & datasheet download, visit www.ibase.com.tw.


IB908 with Heat spreader



IB908 with Heatsink



Dimensions Drawing

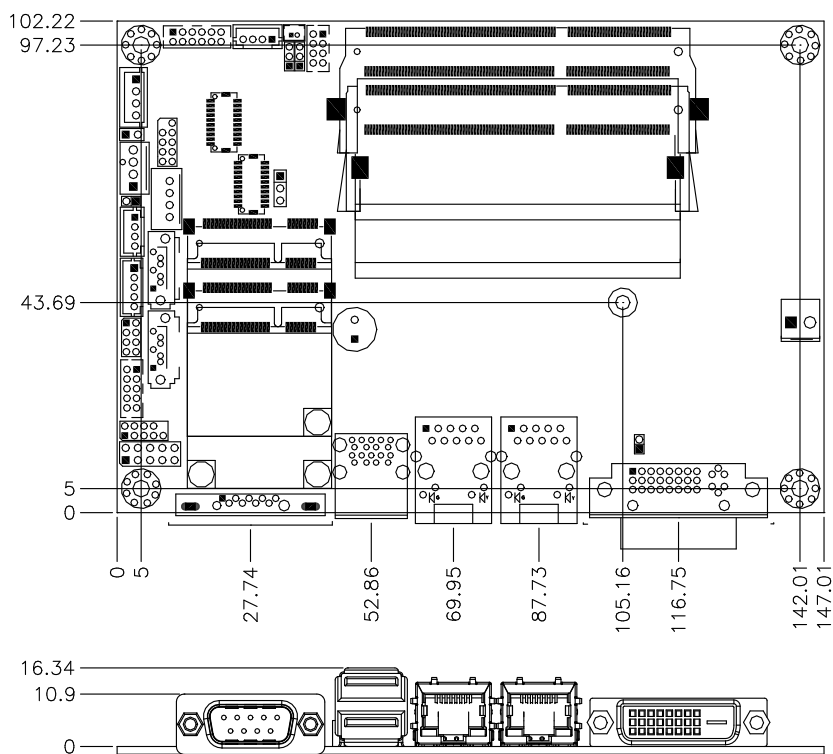

iSMART Technology



EuP/Erp Power Saving
Some Products Use Less Than 0.1W in Off Mode

Auto Power On/Off Scheduler
With Weekly Scheduling Configuration

Power Failure Detector
Supports All Types of Power Supplies

BIOS

Four BIOS screenshots showing configuration options:

- EuP / ErP selection by dedicated controller:** Shows 'EuP/ErP selection by dedicated controller' set to 'Enabled'.
- "Power resume" [POPF] selection from BIOS:** Shows 'Power-On after Power failure' set to 'Enabled'.
- Auto Scheduler Function Set-up:** Shows 'Auto Scheduler' set to 'Enabled'.
- Power-On after Power failure:** Describes the function: 'This field sets the system power status whether on or off when power returns to the system from a power failure situation.' and notes 'More reliable design by Micro-Controller unit than Super I/O'.

Remarks: 1. Specifications are subject to change without prior notice.
2. ODM/OEM is available.
3. For user's manual & datasheet download, visit www.ibase.com.tw.