Shielded Cable with Two 96-Pin Half-Pitch Connectors
PCB96PS-0.5P, PCB96PS-1.5P, PCB96PS-3P, PCB96PS-5P
User's Guide

CONTEC CO.,LTD.

The PCB96PS-0.5P, PCB96PS-1.5P, PCB96PS-3P, and PCB96PS-5P are cables for connecting a 96-pin half-pitch connector on CONTEC board with 96-pin half-pitch connector.

External Dimensions

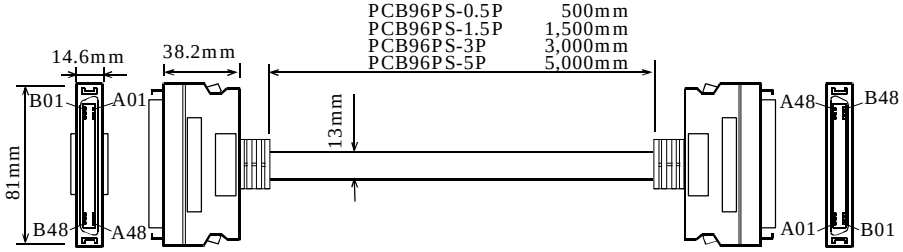

Specifications

Item	Specification
Connector used	96-pin half-pitch, female connector PCR-E96F[HONDA] or equivalent x 2
Cable	96 core shield cable(48pair). Conductor size: AWG#30 Conductor composition: 7pcs/0.10mm UL2464
Weight	260g(PCB96PS-0.5P), 480g(PCB96PS-1.5P), 800g(PCB96PS-3P), 1220g(PCB96PS-5P)

Notes!

- Do not strike or bend the product. Otherwise, the product may malfunction, overheat, cause a failure or breakage.
- Do not insert or remove the connector while the power is turned on to the PC. Failure to observe this precaution may cause malfunction, overheating.
- The specifications of this product are subject to change without notice for quality improvement. Even when using the product continuously, be sure to read the manual and understand the contents.
- Regardless of the foregoing statement, CONTEC assumes no responsibility for any errors that may appear in this document or for any results of using the product.
- All relevant issues have been considered in the preparation of this document. Should you notice an omission or any questionable item in this document, please feel free to notify CONTEC CO., LTD.

Connection Diagram

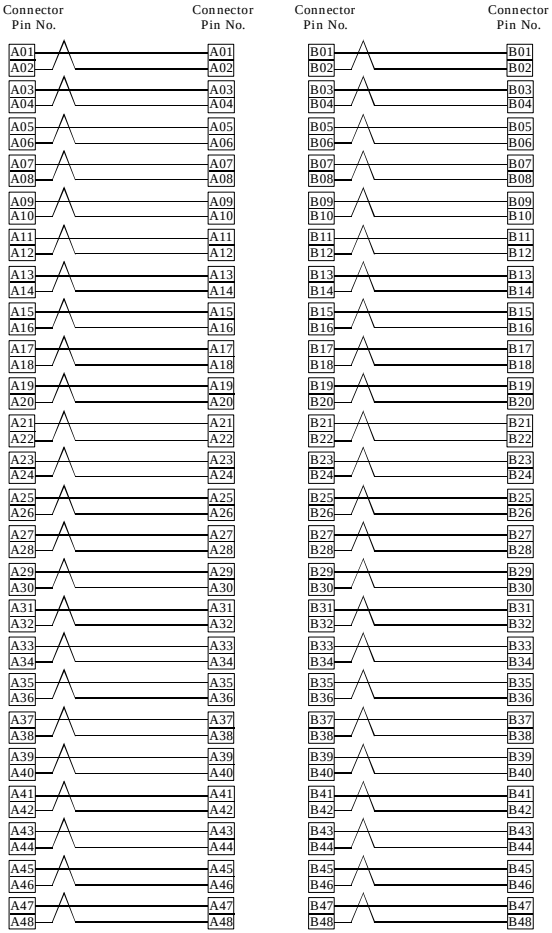

Copyright 2004 CONTEC CO., LTD. ALL RIGHTS RESERVED.

CONTEC CO., LTD. July 2004 Edition
3-9-31, Himesato, Nishiyodogawa-ku, Osaka 555-0025, Japan
Japanese http://www.contec.co.jp/
English http://www.contec.com/ A-46-871 (LYDT581)
Chinese http://www.contec.com.cn/ 07212004_rev2 [05172004]
No part of this document may be copied or reproduced in any form by any means without prior written consent of CONTEC CO., LTD.