

High-speed line driver output 4-Axes
Motion Controller Board for PCI Express

SMC-4DL-PE



* Specifications, color and design of the products are subject to change without notice.

This product is a PCI Express board that supports stepping motors and ("pulse string input" types of) servomotors. SMC-4DL-PE can perform motor control for up to 4 axes. This product has the functions for positioning, origin return, linear interpolation, and for S-curve acceleration and deceleration, capable of multi-axial linear interpolation and speed/position overriding.

This product covers a wide range of applications including semiconductor equipment, test instruments, multi-axis robots, and X-Y robots.

These various functions make it possible to build complex positioning control systems for variety of uses such as manufacturing devices and test devices.

About Migration From The Existing Products

This product cannot use [API-SMC(98/PC)] (CD-ROM attached) which is the driver software for the existing products SMC-2P(PCI), SMC-4P(PCI), and SMC-3(PC). [API-SMC(98/PC)] (bundled CD-ROM) cannot be used. Please use [API-SMC(WDM)] (bundled CD-ROM) which is the driver software for this product. As a reference material when migrating from the existing products to this product, "Migration guide" which summarizes migration methods and differences about initial settings and API function units is provided. Please use the guide for your reference.

" Migration guide" can be downloaded from the download library of CONTEC's Web site (<http://www.contec.com/download>)

Features

Capable of multi-axis independent control and pulse output up to 9.8Mpps

Control for up to 4 axes and motor control pulse output up to 9.8Mpps are available.

Command pulse for motor control supports common pulse, independent pulse and 90° phase difference pulse. Limit input 3channels/axis, general-purpose input 7channels/axis, and general-purpose output 3channels/axis are equipped. Also, depending on the software setting, 5 general-purpose inputs can be used as alarm inputs, and general-purpose outputs as deviation counter clear outputs.

Capable of controlling the jogging at fixed speed or by linear/S-curve acceleration and deceleration, positioning, and origin returning

Carrying a motor control IC in the PCL6100 series from Nippon Pulse Motor Co., Ltd., capable of controlling jogging, positioning, origin returning, synchronization control and linear interpolation

Provided with various input/output formats enabling connection to an encoder input circuit as well as pulse output circuit.

Encoder input circuits can be connected with differential output, TTL level output, and open-collector output. Pulse output circuits can be connected with differential input, opto-coupler and TTL level input.

With the multi-axis synchronization control function, capable of aligning the timing for operation start and end

Synchronization control of multi-axis simultaneous start/stop control, linear interpolation operation is available.

Capable of speed and position overriding

Capable of changing the speed and target position during operation

Comparator circuits allowing the set value and counter value to be compared

A pair of comparator circuits is provided for each axis, allowing the set value and counter value to be compared with each other. They also allow signals to be output while comparator conditions are met.

Provided with seven general-purpose input pins and three general-purpose output pins per axis

Seven general-purpose inputs are provided for each axis, five of which are also available as alarm, positioning completion, deceleration stop, counter latch, and positioning start inputs. Logic can be changed by software.

Three output pins are provided for each axis. The output signals can be switched among alarm clear output, driver deviation clear output and comparator output by the software. Logic can be changed by software.

Dedicated terminal strip CCB-SMC2 (option) available focusing on the ease of use for wiring

A dedicated terminal strip CCB-SMC2 (option) which assigns signals for each axis is provided. Driver units and limit sensors for stepping motors and servo motors can be connected up to 4 pieces.

Functions and connectors are compatible with PCI compatible board SMC-4DL-PCI.


The functions same with PCI compatible board SMC-4DL-PCI are provided. In addition, as there is compatibility in terms of connector shape and pin assignments, it is easy to migrate from the existing system.

Specification

Common Section

Item	Specification
Control target	Stepping motor or servo motor driver unit (pulse train input type)
Number of axes to control	4 axes
Device used	PCL6143 (Nippon Pulse Motor CO., LTD.) or equivalence to it
Interrupt	1 ch
Interrupt factor	When stopping by positive-direction end limit input ON When stopping by negative-direction end limit input ON At the time of stop by alarm input on When stopping by simultaneous stop operation When stopping by deceleration (decelerated stop) input on When occurring the encoder input error The other event (setting by the software)
I/O address	Any 128 ports boundary
Current consumption (Max.)	3.3VDC 1500mA
Operating condition	0 - 50°C, 10 - 90% (No condensation)
Bus specification	PCI Express Base Specification Rev. 1.0a x1
Dimension (mm)	169.33(L) x 110.18(H)
Connector used	HDRA-EC100LFDT+ [mfd by HONDA TSUSHIN KOGYO CO., LTD.] or equivalence to it
Weight	100g

Board Dimensions



The standard outside dimension (L) is the distance from the end of the board to the outer surface of the slot cover.

Encoder Input Section

Item	Specification
Encode type	Incremental
Maximum counter value	8000000h - 7FFFFFFh(-134,217,728 - 134,217,727), 28 bit
Input signal type	Single-phase input (UP/DOWN/Z) / Phase input (A/B/Z)
Supported output type	Differential output, TTL level output, open-collector output
Device used	AM26LS32A(T.I) or equivalence to it
Terminal resistor	150Ω (Separable with SW)
Receiver input sensitivity	±200mV
In-phase input voltage range	±7V
Distance in which signal can be extended	10m (Depending on the time of connecting the differential output, wiring environment and input frequency) 3m (Depending on the time of connecting the open-collector output, wiring environment and input frequency) 1.5m (Depending on the time of connecting the TTL level output, wiring environment and input frequency)
Response frequency (Max.)	5MHz duty (When connecting the differential output, 2-phase Input, Multiply by 4, duty 50%) 3MHz duty (When connecting the TTL level output, 2-phase Input, Multiply by 4, duty 50%) 1MHz duty (When connecting the open-collector output, 2-phase Input, Multiply by 4, duty 50%)

Limit Input Section

Item	Specification
Signal channel	3channels/axis (original point, Forward limit, reserve limit)
Input signal name	ORG : origin input +LIM : positive direction end limit input -LIM : negative direction end limit input
Input logic	Enables selecting the positive/negative logic by using the Software
Input type	Opto-coupler input (corresponding to current sink output)
Response time (Max.)	200 μsec
Input resistor	4.7kΩ
Input ON current	2.0mA or more
Input OFF current	0.16mA or less
External circuit power supply	12V - 24VDC(±10%)

General-purpose Input Section

Item	Specification
Signal channel	7channels/axis
Input signal name	IN1/ALM : alarm input, general-purpose input IN2/INP : positioning completion input, general-purpose input IN3/SD : deceleration (decelerated stop) input, general-purpose input IN4/LTC : counter latch input, general-purpose input IN5/PCS : positioning control start input, general-purpose input IN6 : general-purpose input IN7 : general-purpose input
Input logic	Enables selecting the positive/negative logic by using the Software
Input type	Opto-coupler input (corresponding to current sink output)
Response time (Max.)	200 μsec
Input resistor	4.7kΩ
Input ON current	2.0mA or more
Input OFF current	0.16mA or less
External circuit power supply	12V - 24VDC(±10%)

Pulse Output Section

Item	Specification
Pulse rate	0.3 - 9.8Mpps
Output signal name	CW : pulse / CW output CCW : direction / CCW output
Output signal system	2 Pulse types (pulse for positive/negative direction) or the common pulse type (pulse signal/directional signal) 90° phase difference pulse (lead/lag pulse)
Output form	Un-isolated differential line driver output
Device used	AM26LS31(T.I) or equivalence to it
H level output voltage	2.5V - 5.25V
L level output voltage	0V - 0.5V
Rated output current (Max.)	20mA

General-purpose Output Section

Item	Specification
Number of signal channel	3channels/axis
Output signal name	OUT1 : general-purpose output OUT2 : general-purpose output OUT3 : general-purpose output (Each output pin can be switched with the following functions) ALMCLR : alarm clear output ERC : driver differential clear output CP1 : comparator1 output CP2 : comparator2 output
Signal specification	Un-isolated open collector output (current sink type) (Enables selecting the positive/negative logic by using the Software)
Response time (Max.)	10μsec (when using the loading on the input side 510Ω, +24VDC)
Rated output current (Max.)	100mA per 1ch, 300mA per 1axis
Rated output withstanding voltage (Max.)	50VDC

Support Software

Windows version of motion control driver API-SMC(WDM) [Stored on the bundled CD-ROM driver library API-PAC(W32)]

The API-SMC(WDM) is the Windows version driver library software that provides products in the form of Win32 API functions (DLL). Various sample programs such as Visual Basic and Visual C++, etc and diagnostic program useful for checking operation is provided.

< Operating environment >

OS Windows Vista, XP, Server 2003, 2000

Adaptation language Visual Basic, Visual C++, Visual C#

You can download the updated version from the CONTEC's Web site (<http://www.contec.com/apipac/>). For more details on the supported OS, applicable language and new information, please visit the CONTEC's Web site.

Cable & Connector

Cable(Optional)

Shielded Cable With Two 100pin Connector

: PCB100PS-0.5 (0.5m)
: PCB100PS-1.5 (1.5m)
: PCB100PS-3 (3m)
: PCB100PS-5 (5m)

Flat Cable with One 100-Pin Connector : PCA100P-1.5 (1.5m)

: PCA100P-3 (3m)
: PCA100P-5 (5m)

Accessories

Accessories (Option)

Connection Conversion Board for SMC : CCB-SMC2 *1*2*3

Screw Terminal (M3*100) : EPD-100A *2*3*4

*1 Distributes 100-pin 0.8-mm connector x 1 to: D-SUB 37 connector x 4, D-SUB-9 connector x 4.

*2 A PCB100PS optional cable is required separately.

*3 Cables and accessories are required each connector.

*4 "Spring-up" type terminal is used to prevent terminal screws from falling off.

* Check the CONTEC's Web site for more information on these options.

Packing List

Board [SMC-4DL-PE] ... 1


First step guide ... 1

CD-ROM *1 [API-PAC(W32)] ... 1

*1 The CD-ROM contains the driver software and User's Guide.

How To Connect The Connectors

The on-board interface connector is used when connecting this product and the external devices.

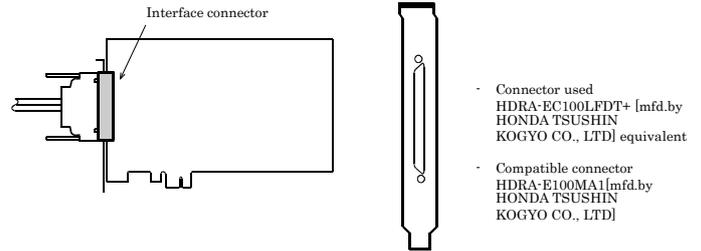

* Please refer to page 3 for more information on the supported cable and accessories.

Pin Assignments of Interface Connector

CN1	
axis0 : P-COM	100
axis0 : IN1/ALM	99
axis0 : IN2/INP	98
axis0 : IN3/SD	97
axis0 : IN4/LTC	96
axis0 : IN5/PCS	95
axis0 : IN6	94
axis0 : IN7	93
axis0 : ORG	92
axis0 : +LIM	91
axis0 : -LIM	90
axis1 : P-COM	89
axis1 : IN1/ALM	88
axis1 : IN2/INP	87
axis1 : IN3/SD	86
axis1 : IN4/LTC	85
axis1 : IN5/PCS	84
axis1 : IN6	83
axis1 : IN7	82
axis1 : ORG	81
axis1 : +LIM	80
axis1 : -LIM	79
axis0 : A+	78
axis0 : A-	77
axis0 : B+	76
axis0 : B-	75
axis0 : Z+	74
axis0 : Z-	73
axis1 : A+	72
axis1 : A-	71
axis1 : B+	70
axis1 : B-	69
axis1 : Z+	68
axis1 : Z-	67
axis0 : OUT3	66
axis0 : OUT2	65
axis0 : OUT1	64
axis0 : DIR+/CCW+	63
axis0 : DIR-/CCW-	62
axis0 : OUT+/CW+	61
axis0 : OUT-/CW-	60
GND	59
axis1 : OUT3	58
axis1 : OUT2	57
axis1 : OUT1	56
axis1 : DIR+/CCW+	55
axis1 : DIR-/CCW-	54
axis1 : OUT+/CW+	53
axis1 : OUT-/CW-	52
GND	51
axis2 : P-COM	50
axis2 : IN1/ALM	49
axis2 : IN2/INP	48
axis2 : IN3/SD	47
axis2 : IN4/LTC	46
axis2 : IN5/PCS	45
axis2 : IN6	44
axis2 : IN7	43
axis2 : ORG	42
axis2 : +LIM	41
axis2 : -LIM	40
axis3 : P-COM	39
axis3 : IN1/ALM	38
axis3 : IN2/INP	37
axis3 : IN3/SD	36
axis3 : IN4/LTC	35
axis3 : IN5/PCS	34
axis3 : IN6	33
axis3 : IN7	32
axis3 : ORG	31
axis3 : +LIM	30
axis3 : -LIM	29
axis2 : A+	28
axis2 : A-	27
axis2 : B+	26
axis2 : B-	25
axis2 : Z+	24
axis2 : Z-	23
axis3 : A+	22
axis3 : A-	21
axis3 : B+	20
axis3 : B-	19
axis3 : Z+	18
axis3 : Z-	17
axis2 : OUT3	16
axis2 : OUT2	15
axis2 : OUT1	14
axis2 : DIR+/CCW+	13
axis2 : DIR-/CCW-	12
axis2 : OUT+/CW+	11
axis2 : OUT-/CW-	10
GND	9
axis3 : OUT3	8
axis3 : OUT2	7
axis3 : OUT1	6
axis3 : DIR+/CCW+	5
axis3 : DIR-/CCW-	4
axis3 : OUT+/CW+	3
axis3 : OUT-/CW-	2
GND	1

* Axis0 - Axis3 of this manual corresponds to Axis No.1 - Axis No.4 in API-SMC(WDM).


P-COM	Plus common	B+	Encoder phaseB input+
IN1/ALM	General-purpose input1/Alarm input	B-	Encoder phaseB input-
IN2/INP	General-purpose input2/Positionig input	Z+	Encoder phaseZ input+
IN3/SD	General-purpose input3/Slow down input	Z-	Encoder phaseZ input-
IN4/LTC	General-purpose input4/counter latch input	OUT1	General-purpose output1
IN5/PCS	General-purpose input5/positioning operation start input	OUT2	General-purpose output2
IN6	General-purpose input6	OUT3	General-purpose output3
IN7	General-purpose input7	DIR+/CCW+	Direction/CCW output+
ORG	Origin input	DIR-/CCW-	Direction/CCW output-
+LIM	Positive-direction limit	OUT+/CW+	Pulse/CW output+
-LIM	Negative-direction limit	OUT-/CW-	Pulse/CW output-
A+	Encoder phaseA input+	GND	Power ground input (common to internal GND)
A-	Encoder phaseA input-		

Connecting Output Signals

Pulse output circuit (CW, CCW)

The pulse output circuit on this product, which is in the form of a differential line driver (AM26LS31 equivalent) as shown in the following figure, can be connected with differential input, opto-coupler, and TTL level input.


Connection with the differential input

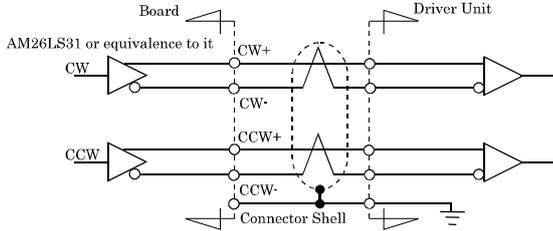


CAUTION

Please use the shielded twisted-pair cable as a noise measures when connecting it with the differential input.


Connection with the opto-coupler input (When the driver unit guarantees the connection with the differential output)

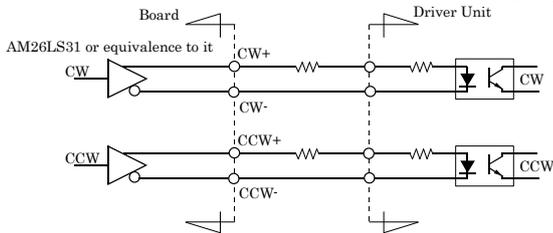

Connection with the opto-coupler input

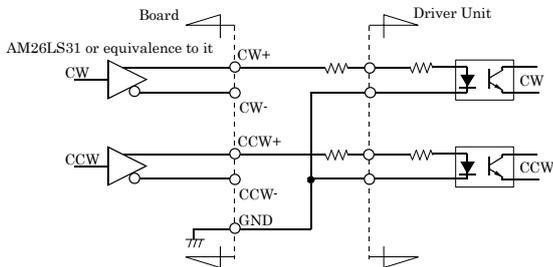

Connection with TTL level input

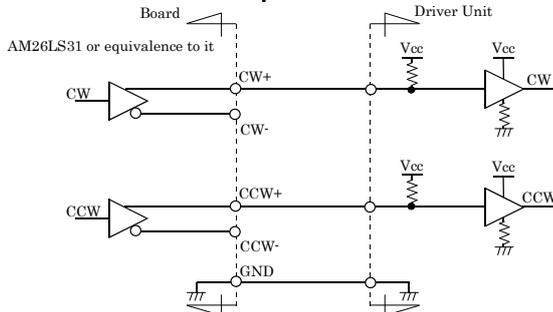

CAUTION


When connecting with the photo-coupler input or the TTL level input, check the specification for the driver unit beforehand.

In addition, please insert a current-limiting resistor according to the allowable current and drive current of the connected input circuit.

To prevent the circuit from malfunctioning due to noise, wire it as far away from other signal lines and noise sources as possible.

Control signal/general-purpose signal output circuit (OUT1 - OUT3, ERC, CP1, CP2)

Output circuit of each output signal on this product is illustrated below. The signal output is an open-collector output. A ground wire must therefore be connected for driving.

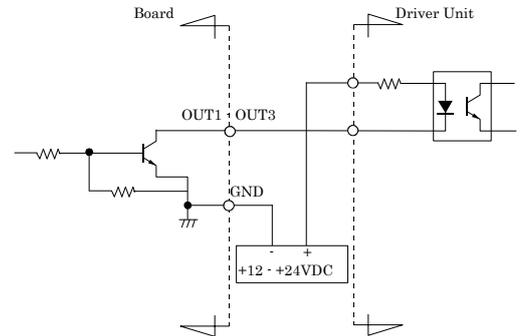


Connecting Input Signals

Encoder input circuit

Encoder input circuit on this product is illustrated below. The signal input is a differential input capable of connecting a line driver output, TTL level output and open-collector output.


Connection with the differential output

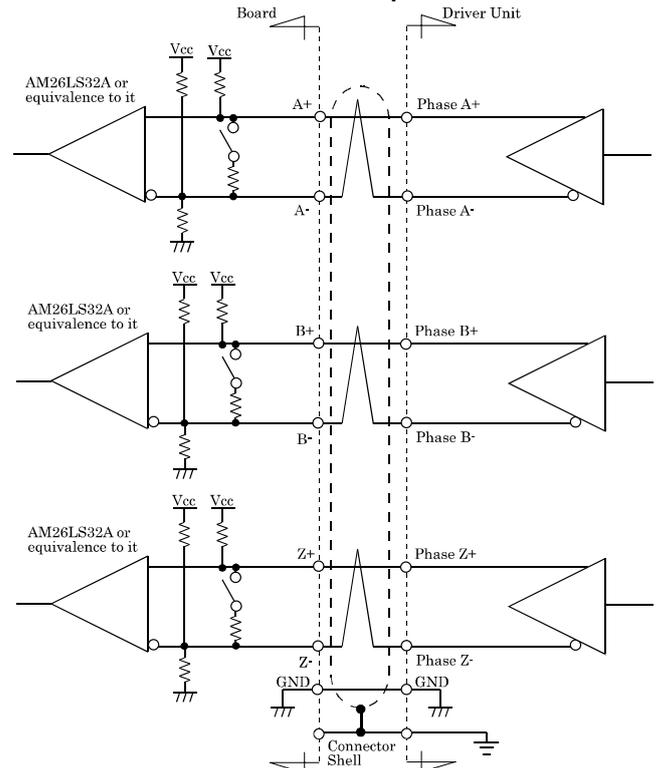


CAUTION

Please use the shielded twisted-pair cable as a noise measures when connecting it with the differential output.

Connection with the TTL level output

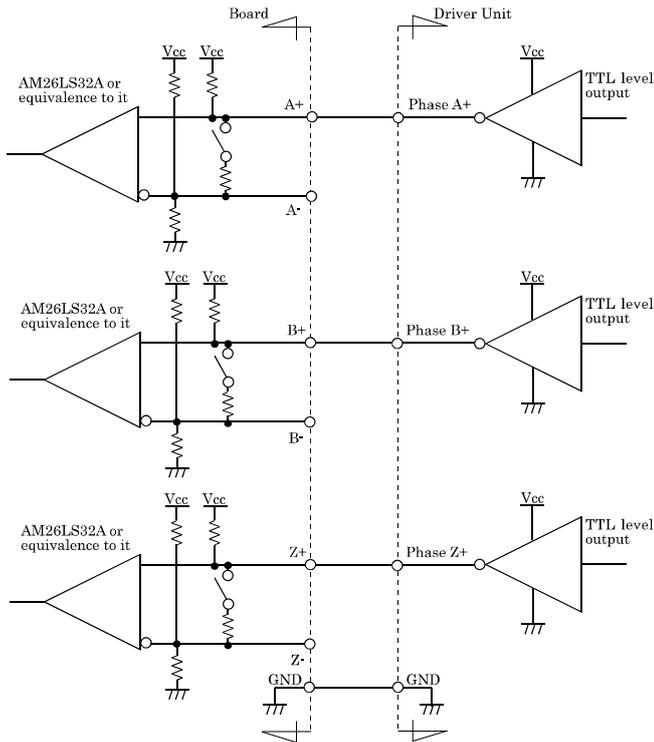

Connection with the open-collector output

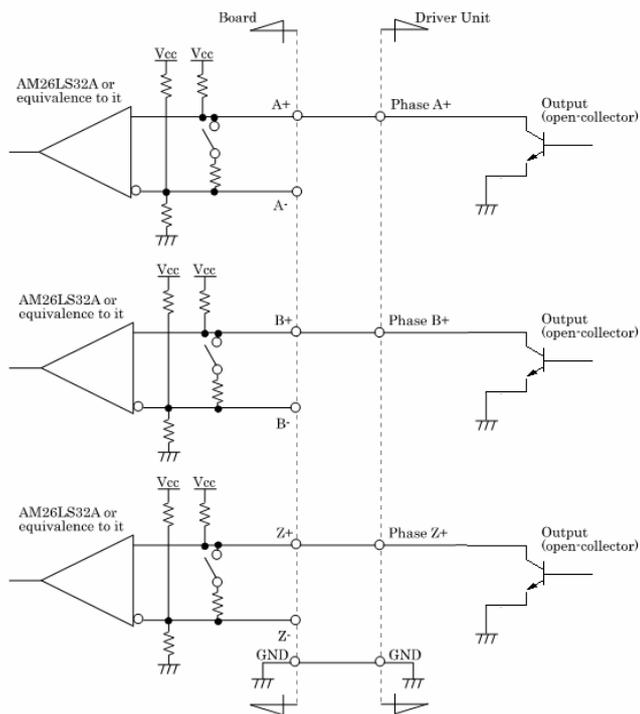

CAUTION

When connecting open-collector output signals or TTL level output signals, please do not insert a terminal resistor with reference to "Chapter 2, Setting the Terminal Resister" in this manual. When inserted with a terminal resistor (factory setting), this product may malfunction, overheat, or causes a failure.


Restrict the use of cables to 10m for the line driver output, 3m for the open-collector output, and 1.5m for the TTL level output.

To prevent the circuit from malfunctioning due to noise, wire it as far away from other signal lines and noise sources as possible.

Limit input/general-purpose input/control input circuit (IN1 - IN7, +LIM, -LIM, ORG)

The limit input/general-purpose input/control input circuit on this board is illustrated below.

The signal input is a current drive input by opto-coupler (Corresponding to the current sink output). To drive the limit input/general-purpose input/control input block, therefore, an external power supply is required at +12 - +24 V.

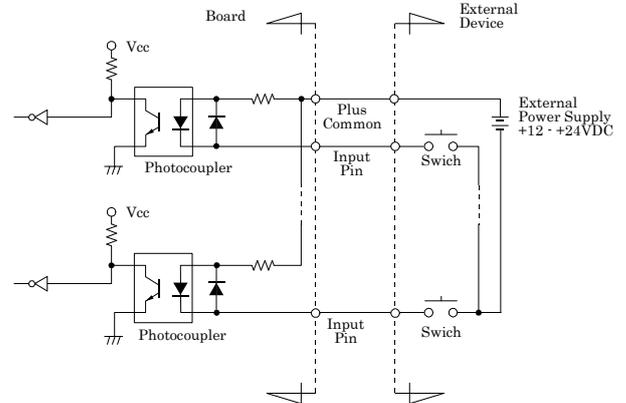


* Input pin is IN1 - IN7, +LIM, -LIM, ORG.

Connection Examples


Given below are practical examples of connection of this product that outputs pulses by the independent pulsing method to motor drivers. These examples show the connections through axis0 (Axis No.1 in API-SMC(WDM)).

Example of Connection to driver unit (Σ II Series) for Servo motor

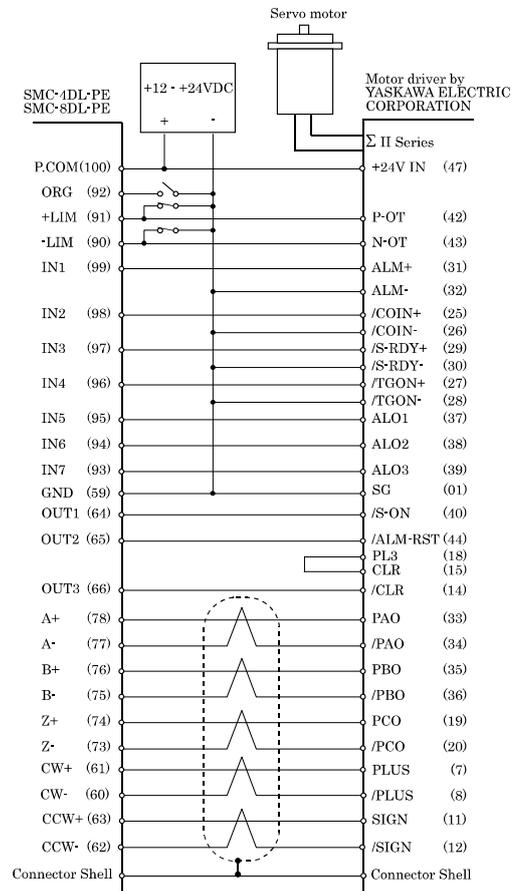

* Please connect the Shield Line of cable with the Connector Shell.

System Configuration Example Of Motion Control

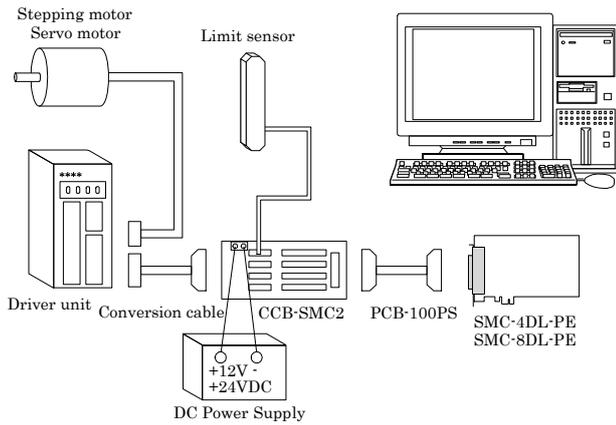

Component features

Item	Description
SMC-4DL-PE (Main board)	When installed on the PC, this board generates pulses required for position control.
PCB-100PS (Option)	This cable connects the board to the CCB-SMC2.
CCB-SMC2 (Option)	This screw terminal is used to efficiently connect the devices (the board, driver unit, DC power supply, limit sensor) required for position control. The screw terminal can connect a four-axes motion control system alone.
Conversion cable (User)	The shape of the control connector of each driver unit is largely different depending on the manufacturer and type. A conversion cable must be prepared to connect each driver unit to the CCB-SMC2.
Driver unit (Motor maker)	Motor and driver unit to be subject to motion control.
Stepping motor Servo motor (Motor maker)	Available in various types by motor capacity, power-supply voltage, and motor shape. Select the ones that best fit your needs.
Limit sensor (Switch maker)	This sensor is installed at the forward/backward limit and origin detection positions. When a table is used in the system, the sensor is bundled with the table. For a self-made system, use commercially available switches.
DC Power supply (Power supply maker)	Power supply to the CCB-SMC2. Use a 12 - 24-VDC power supply.

Block Diagram

